


## POWERED ASSET INSTALL GUIDE

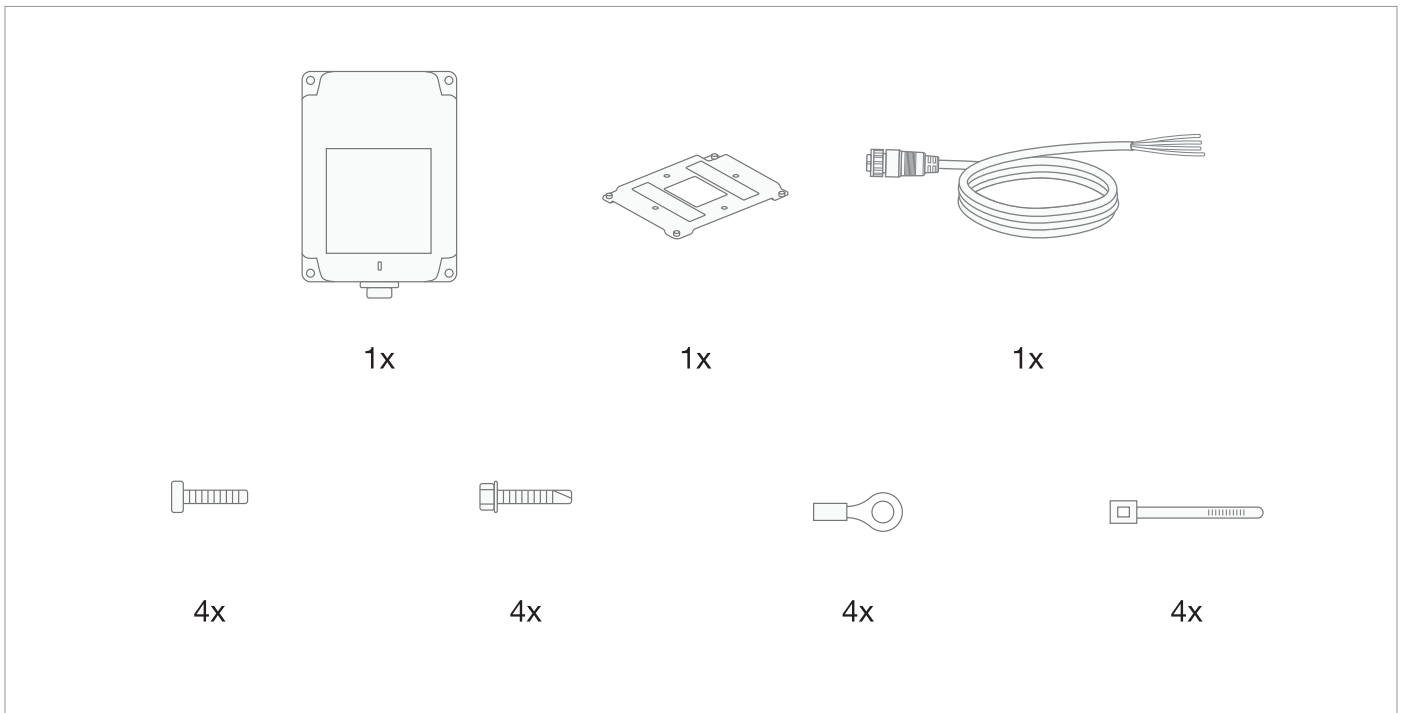

Attach mounting plate using adhesive and secure with 4 self-tapping screws (bag 1). Secure AG24 to mounting plate using 4 flat-end screws (bag 2).

Plug cable into AG24 and twist to secure. Verify the AG indicator light turns green, this could take 1-3 minutes.

While the vehicle or equipment is turned off, connect the red "Power" wire to a 12-24VDC power source (i.e. battery positive) terminal.

While the vehicle or equipment is turned off, connect the black wire labeled "Ground" to the ground (i.e. battery negative) terminal.

With the vehicle or equipment turned on, identify the pin/terminal registering 2.5-3.5V. This pin/terminal is the CAN hi pin. Then identify the pin/terminal registering 1.5-2.5V. This pin/terminal is the CAN lo pin. Please verify both of these measurements with a multimeter.

Again, while the vehicle or equipment is turned off, connect the "CAN hi" wire to the pin/terminal identified as the CAN hi pin. Then connect the "CAN lo" wire to the pin/terminal identified as the CAN lo pin.